

X-LF / X-LFV



Metall Kabelverschraubungen / metal cable glands




| | |
|--------------------------------|---|
| Ausführung construction | Standard (X-LF) standard (X-LF) Hochtemperatur (X-LFV) high temperature (X-LFV) |
| Werkstoff material | Edelstahl stainless steel |
| Dichtring sealing | TPE O-RING NBR VITON (X-LFV) O-RING VITON (X-LFV) |
| Temperatur temperature | -40°C - +100°C (X-LF) -25°C - +230°C (X-LFV) |
| Schutzart protection | IP68 - 5 bar |
| Besonderheit specials | Dichtung über Klemmkäfig (X-LF) sealing by clamping cage (X-LF) Verschraubung mit Vollgummi-Dichteinsatz (X-LFV) Cable gland with solid rubber clamping insert (X-LFV) |

Standard X-LF / standard X-LF

| Art. Nr. V2A art. no..1.4305 | Art. Nr. V4A art. no..1.4571 | Gewinde thread | für Kabel for cable | SW mm | L mm | H mm | VPE Stk. unit pcs. |
|---------------------------------|---------------------------------|-------------------|------------------------|----------|---------|---------|-----------------------|
| X-LFM1610 | X-LFM1610V4A | M16 x 1,5 | 5 - 10 | 17 | 5,5 | 22 | 50 |
| X-LFM2014 | X-LFM2014V4A | M20 x 1,5 | 8 - 14 | 22 | 6 | 24 | 50 |
| X-LFM2519 | X-LFM2519V4A | M25 x 1,5 | 12 - 19 | 30 | 7 | 28 | 25 |
| X-LFM3222 | X-LFM3222V4A | M32 x 1,5 | 15 - 22 | 34 | 8 | 30 | 25 |
| X-LFM4028 | X-LFM4028V4A | M40 x 1,5 | 22 - 28 | 44 | 8 | 35 | 10 |
| X-LFM5036 | X-LFM5036V4A | M50 x 1,5 | 28 - 36 | 54 | 9 | 43 | 5 |
| X-LFM6349 | X-LFM6349V4A | M63 x 1,5 | 34 - 49 | 66 | 10 | 48 | 5 |

Hochtemperatur X-LFV / high temperature X-LFV

| Art. Nr. V2A art. no.1.4305 | Art. Nr. V4A art. no.1.4571 | Gewinde thread | für Kabel for cable | SW mm | L mm | H mm | VPE Stk. unit pcs. |
|--------------------------------|--------------------------------|-------------------|------------------------|----------|---------|---------|-----------------------|
| X-LFVM1205 | X-LFVM1205V4A | M12 x 1,5 | 2,5 - 5 | 14 | 5 | 22 | 50 |
| X-LFVM1207 | X-LFVM1207V4A | M12 x 1,5 | 5 - 7 | 14 | 5 | 22 | 50 |
| X-LFVM1605 | X-LFVM1605V4A | M16 x 1,5 | 3 - 5 | 17 | 5,5 | 24 | 50 |
| X-LFVM1607 | X-LFVM1607V4A | M16 x 1,5 | 5 - 7 | 17 | 5,5 | 24 | 50 |
| X-LFVM1609 | X-LFVM1609V4A | M16 x 1,5 | 7 - 9 | 17 | 5,5 | 24 | 50 |
| X-LFVM1610 | X-LFVM1610V4A | M16 x 1,5 | 8 - 10 | 17 | 5,5 | 24 | 50 |
| X-LFVM2008 | X-LFVM2008V4A | M20 x 1,5 | 4 - 8 | 22 | 6 | 27 | 50 |
| X-LFVM2010 | X-LFVM2010V4A | M20 x 1,5 | 7 - 10 | 22 | 6 | 27 | 50 |
| X-LFVM2012 | X-LFVM2012V4A | M20 x 1,5 | 10 - 12 | 22 | 6 | 27 | 50 |
| X-LFVM2014 | X-LFVM2014V4A | M20 x 1,5 | 11 - 14 | 22 | 6 | 27 | 50 |
| X-LFVM2514 | X-LFVM2514V4A | M25 x 1,5 | 11 - 14 | 30 | 7 | 31 | 25 |
| X-LFVM2519 | X-LFVM2519V4A | M25 x 1,5 | 15 - 19 | 30 | 7 | 31 | 25 |
| X-LFVM3218 | X-LFVM3218V4A | M32 x 1,5 | 15 - 18 | 34 | 8 | 32 | 25 |
| X-LFVM3222 | X-LFVM3222V4A | M32 x 1,5 | 19 - 22 | 34 | 8 | 32 | 25 |
| X-LFVM4024 | X-LFVM4024V4A | M40 x 1,5 | 21 - 24 | 44 | 8 | 39 | 10 |
| X-LFVM4028 | X-LFVM4028V4A | M40 x 1,5 | 25 - 28 | 44 | 8 | 39 | 10 |

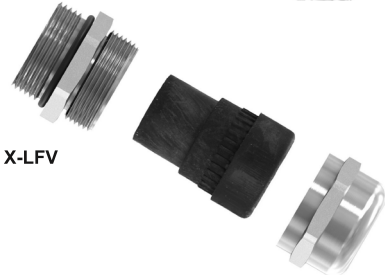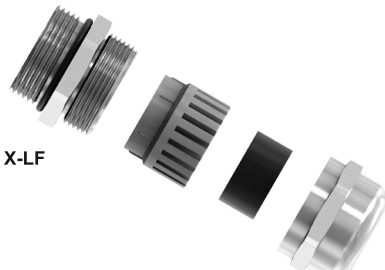

Auf Anfrage
on request



Multi-einsätze
multi-inserts



Langes Gewinde
long thread



Flachkabeleinsätze
flat cable inserts

