

FF-FL



Ausführung construction	Flanschanschluss 45°/90° flange connector 45°/90°	
Werkstoff material	Polyamid 6, UL94 V0 polyamide 6, UL94 V0	
Temperatur temperature	-40°C - +105°C kurzz. / short term +150°C	
Schutzart protection	IP66 / 68 / IP69K	
gemäß according to	IEC EN 61386	
Passende Wellrohre suitable corrugated conduits	alle all	



Flanschanschluss 90°
flange connector 90°


Flanschanschluss 45°
flange connector 45°

FF-Flansch / flange / 90°

Art. Nr. IP66 art. no. IP66	Art. Nr. IP68/69K art. no. IP68/69K	NW DN	ID mm	B mm	C mm	SW mm	L mm	VPE Stk. unit pcs.
6*FF17	8*FF17	17	16,4	40,0	29,5	20	60,0	50
6*FF23	8*FF23	23	21,7	53,0	40,0	26	75,0	30
6*FF29	8*FF29	29	29,1	58,5	46,0	32	81,4	20
6*FF36	8*FF36	36	36,0	64,0	51,0	40	97,3	20
6*FF48	8*FF48	48	47,8	78,0	64,0	55	115,0	10

6B... = Schwarz / black

6G... = grau / grey

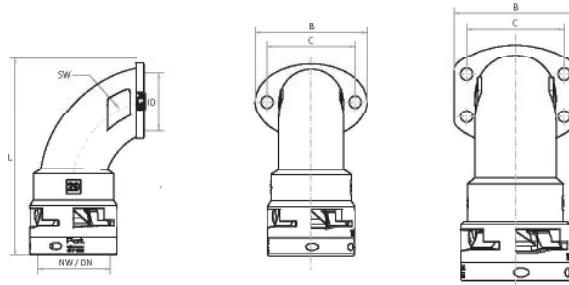

FL-Flansch / flange / 45°

Art. Nr. IP66 art. no. IP66	Art. Nr. IP68/69K art. no. IP68/69K	NW DN	ID mm	B mm	C mm	SW mm	L mm	VPE Stk. unit pcs.
6*FL17	8*FL17	17	16,4	40,0	29,5	20	74,5	50
6*FL23	8*FL23	23	21,7	53,0	40,0	26	89,5	30
6*FL29	8*FL29	29	29,1	58,5	46,0	32	100,3	20
6*FL36	8*FL36	36	36,0	64,0	51,0	40	124,0	20

6B... = Schwarz / black

6G... = grau / grey

