

## CSF - SFMIL



RINA




<b>Ausführung</b> construction	starres Innengewinde rigid female thread	
<b>Werkstoff</b> material	Polyamid 6, UL94 V0 polyamide 6, UL94 V0	
<b>Temperatur</b> temperature	-40°C - +105°C kurzz. / short term +150°C	
<b>Schutzart</b> protection	CSF: IP66 SFMIL: IP68 / IP69K	
<b>gemäß</b> according to	IEC EN 61386	
<b>Passende Wellrohre</b> suitable corrugated conduits	alle all	



## SENSOR

Art. Nr. art. No.	Gewinde thread	NW DN	ID mm	A mm	OD2 mm	L mm	VPE Stk. unit pcs.
6CSF07F08	M08x1	7	7	8	14	34	100
6CSF07F12	M12x1	7	11	6,5	17	52	100
6CSF07F18	M18x1	7	17	6,5	23	59	100
6CSF07F30	M30X1,5	7	28,5	6,5	35	55,5	100
6CSF10F12	M12x1	10	11	6,5	17	53,4	50
6CSF10F18	M18x1	10	17	6,5	23	60,4	50
6CSF10F30	M30X1,5	10	28,5	6,5	35	56,9	50

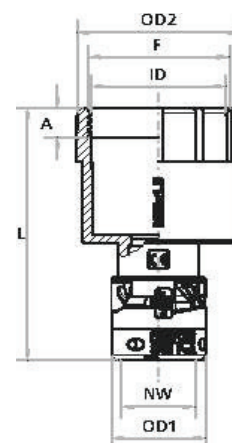

## MIL

Art. Nr. schwarz art. no. black	Gewinde thread	NW DN	MIL DTL-5015	GL mm	L mm	VPE Stk. unit pcs.
8BSFMIL12U07	5/8"	24 UNEF	12	10	40,65	50
8BSFMIL12U11	7/8"	20 UNEF	12	16	41,65	50
8BSFMIL17U09	3/4"	20 UNEF	17	14	42,85	50
8BSFMIL17U11	7/8"	20 UNEF	17	16	42,85	50
8BSFMIL17U13	1"	20 UNEF	17	18	42,85	50
8BSFMIL17U16	1"3/16	18 UNEF	17	20/22	42,85	50
8BSFMIL23U16	1"3/16	18 UNEF	23	20/22	52	30
8BSFMIL23U20	1"7/16	18 UNEF	23	24/28	53	30
8BSFMIL23U25	1"3/4	18 UNS	23	32	53	30
8BSFMIL29U20	1"7/16	18 UNEF	29	24/28	54,5	20
8BSFMIL29U25	1"3/4	18 UNS	29	32	54	20
8BSFMIL36U20	1"7/16	18 UNEF	36	24/28	62,5	20
8BSFMIL36U25	1"3/4	18 UNS	36	32	62,5	20
8BSFMIL36U26	2"	18 UNS	36	36	63	20
8BSFMIL48U27	2"1/4	16 UN	48	40	70	10

